


# Line Thermal Printer



## WP-T8002

Interface : Built-in USB / RS-232, Parallel, Ethernet, Bluetooth and Wifi are optional

Printing speed : 220 mm/s

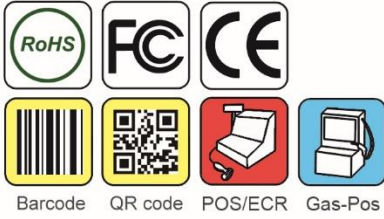

White



Black

### Interface Cards



RS-232

Parallel

Ethernet

Bluetooth

Wifi

### Accessory



58 mm paper separator

### Specification

Model	WP-T8002		
Printing method	Thermal line		
Printing speed	220 mm/s		
Command	ESC/POS		
Driver and SDK	Linux, Windows, OPOS, Andriod SDK and JavaPOS		
Character structure	Alphanumeric (Font A)	Alphanumeric (Font B)	Kanji
Columns	12 x 24	9 x 17	24 x 24
Character size	80mm / 58mm	48 columns / 34 columns	64 columns / 45 columns
Density	1.50 (W) x 3.00 (H)	1.13 (W) x 2.13 (H)	24 columns / 17 columns
Fonts	203dpi		
Bar code	Multilingual code page x 46, Chinese, Japanese, Thai, Korean and Unicode		
Detectors	UPC-A, UPC-E, EAN13, EAN8, CODE39, CODE93, CODABAR, CODE128, ITF, QR Code		
Paper	Paper end, Paper near end, Cover, Printer head overheat and Cutter jam		
Paper roll size	Single-ply thermal paper roll		
Paper thickness	57.5±0.5 (W) x 83 mm (Dia) / 79.5±0.5 (W) x 83 mm (Dia)		
Drawer output	0.05 ~ 0.06 mm		
Reliability	Head	2 (RJ11 / 6 PIN)	
Memory	Cutter	100 km or more	
Power supply	Buffer	1,000,000 times	
Interface	SRAM	4K bytes	
Weight	Flash	128K bytes	
External dimension	1M bytes (NV Image)		
Temperature	+24 VDC / 2.5 A		
Humidity	Built-in USB / RS-232C, Parallel, MQTT, Ethernt, Bluetooth and Wi-Fi are optional		
	Operating	1.44 kg	
	Storage	140 (W) x 190 (D) x 135 (H) mm	
	Operating	0 ~ 45°C	
	Storage	-20 ~ 60°C	
	Operating	10 ~ 90 %RH	
	Storage	10 ~ 90 %RH	